


SPIRAL MIXER-FIXED BOWL SERIES

SINMAG machines

SM2-25/SM2-50/SM2-50T/SM2-60T/SM2-80T option panel



SM2-120T/SM2-200T option panel

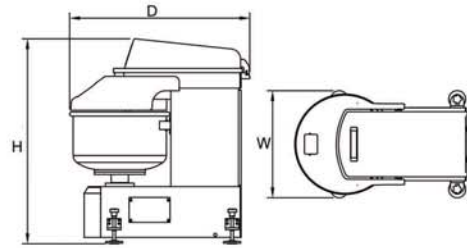

Features

- Digital control panel.
- Solid construction.
- SM2-25, SM2-50 single-motor driven.
- From SM2-50T, two motors.
- Short mixing time with excellent kneading result.
- Switch for manual or automatic function.
- With dust cover.
- Mounted on castors, easily movable.
- Stainless steel hook and bowl.
- ABS plastic cover or safety grids cover for choice. (SM2-25, ABS safety cover only)




Model	SM2-25	SM2-50	SM2-50T	SM2-60T	SM2-80T	SM2-120T	SM2-200T
Capacity(kg) Flour	12.5	25	25	37.5	50	75	125
Capacity(kg) Dough	25	50	50	60	80	120	200
Spiral Power(kw)	2.2	3	3	4.5	4.5	9	12
Bowl Power(kw)	/	/	0.75	0.75	0.75	0.55	1.5
Spiral Speed(rpm) 1st Speed	140	135	135	135	125	110	98
Spiral Speed(rpm) 2nd Speed	280	270	270	270	250	220	196
Bowl Speed(rpm) 1st Speed	12.8	12.8	17.8	17.8	17.2	13	11
Bowl Speed(rpm) 2nd Speed	25.5	25.5	17.8	/	17.2	13	11
Weight(kg)	157.5	280	285	325	425	640	1050
Outside Dimension(mm) (W*D*H)	590X850X1100	640X1080X1120	640X1080X1220	660X1000X1300	765X1280X1310	830X1470X1460	980X1710X1580

SPIRAL MIXER-FIXED BOWL SERIES

SINMAG machines



Control panel for KM-25/50T/80T/120T

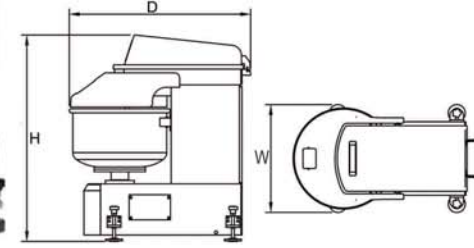

Features

- Digital control panel.
- Solid construction.
- KM-25 single-motor driven.
- From KM-50T, two motors.
- Three timers for programming reverse direction and both speeds.
- Short mixing time with excellent kneading result.
- Switch for manual or automatic function.
- With dust cover.
- Mounted on castors, easily movable.
- Stainless steel hook and bowl.
- ABS plastic cover and safety grids cover for choice. (KM-25, ABS safety cover only)



Model	KM-25	KM-50T	KM-80T	KM-120T
Capacity(kg) Flour	12.5	25	50	75
Capacity(kg) Dough	25	50	80	120
Spiral Power(kw)	2.2	3	4.5	9
Bowl Power(kw)	/	0.75	0.75	0.55
Spiral Speed(rpm) 1st Speed	140	135	125	110
Spiral Speed(rpm) 2nd Speed	280	270	250	220
Bowl Speed(rpm) 1st Speed	12.8	17.8	17.2	13
Bowl Speed(rpm) 2nd Speed	25.5	/	/	/
Weight(kg)	150	320	390	610
Outside Dimension(mm) (W*D*H)	490X860X1070	600X1000X1200	720X1210X1350	830X1350X1400

Drawings, descriptions and photos are not contractual and can be modified.

Drawings, descriptions and photos are not contractual and can be modified.